



## AUGERS TO SUIT ANY SITUATION

All Auger Torque Augers are built from high grade steel and incorporate many features that will allow you to work more efficiently and make your job easier.


### Shallow Pitch Flights

By working with and, more importantly, listening to operators feedback we have developed the perfect pitch for our flights. It will cut at its maximum efficiency and, most importantly the spoil will stay on your Auger when you remove it from the hole.

### Pilot and Tooth Options

Auger Torque Augers are offered with many different tooth and pilot options to suit your specific need. For example in the S4 range we offer up to eight different combinations and we have the know-how to help you select the optimal configuration.

**SHOCK LOCK™**  
Tooth Locking System

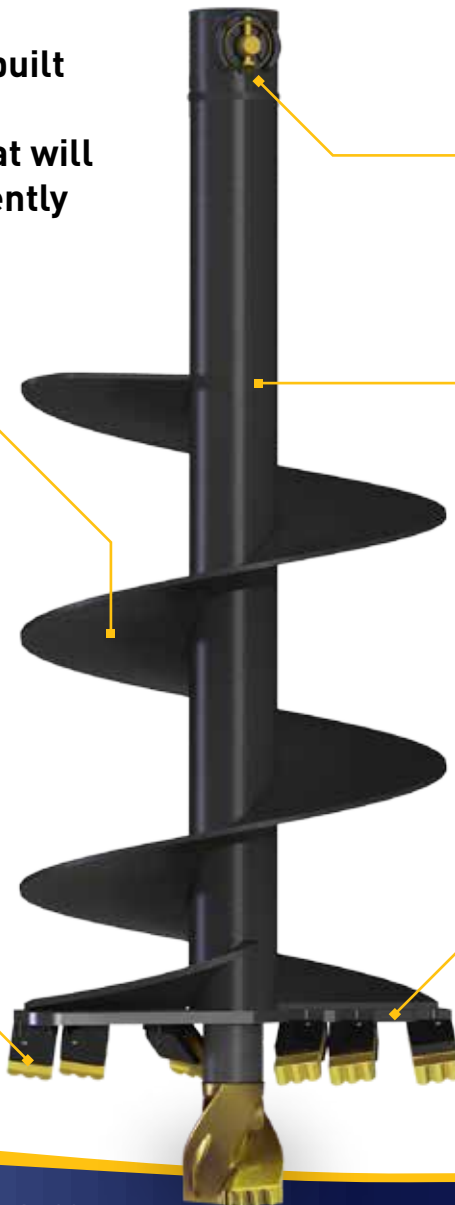

### Multiple Hub Options

Our Augers are available with all major standard hubs on the market, including:-


- ▶ Hex: 2", 2.5", 3 and 4"
- ▶ Round: 50mm, 2" and 4"
- ▶ Square: 57mm, 75mm, 100mm, 110mm and 130mm

### Heavy Duty Tube

We know that our Augers can expect a tough life, so we only use the highest grade steel and vary our tube size according to machine size and application. Our Augers have a reputation of being the toughest on the market.

### Constant Spiral Cut

Our boring heads are designed with a Constant Spiral Cut. Teeth are located so that each makes its own fresh cut on every revolution and are angled to direct spoil towards the centre of the auger. The tooth cutting angle ensures spoil is broken up thoroughly to avoid any clogging.



## SHOCK LOCK™ Tooth Locking System



With our patented Shock Lock™ Tooth Locking System tooth loss is now a thing of the past. Using the Shock Lock™ pin and rubber in our unique Shock Lock™ tooth holders ensures your Auger teeth are safely locked in place and protected against shock fractures.

### DON'T LEAVE YOUR TEETH DOWN THE HOLE

Replacing worn teeth is a breeze with this system, simply knock out the old pin with a standard hole punch and the tooth will slide out of the holder with ease. Acclaimed as the best system on the market you will never need to worry about fitting spare teeth due to losing them again.

## Specifications

### S2 AUGERS

Hub Options: 50mm Round  
Stihl  
Wear parts: Earth (Shock Lock™)  
Tungsten (Shock Lock™)  
Overall Length: 0.9m

### S5 AUGERS

Hub Options: 75mm Square\*  
Wear parts: Earth (Shock Lock™)  
Tungsten (Shock Lock™)  
Rock  
Overall Length: 1.5m

### PA AUGERS

Hub Option: 110mm Square\*  
Wear parts: Earth  
Rock  
Overall Length: 2.3 & 3.3m

### S4 AUGERS

Hub Options: 65mm Round\*  
Wear parts: Earth (Shock Lock™)  
Tungsten (Shock Lock™)  
Extra Dig  
Pilot Extension  
Overall Length: 1.2m

### S6 AUGERS

Hub Option: 75mm Square\*  
Wear parts: Earth (Shock Lock™)  
Tungsten (Shock Lock™)  
Rock  
Overall Length: 1.88m

\*Hub adaptors available



S4 Extra Dig Pilot



S5 fixed and telescopic extension

		AUGER FLIGHT LENGTH (mm)																	
		Dia.	100	150	200	225	250	300	350	400	450	500	600	750	800	900	1M	1.2M	1.5M
Auger Range	S2	FF	FF	FF	FF	FF	FF	-	-	-	-	-	-	-	-	-	-	-	-
	S4	FF	780	750	750	700	700	675	625	625	625	600	525	525	525	-	-	-	-
	S5	-	1080	977	975	965	900	900	875	750	750	750	700	700	700	525	525	-	-
	S6	-	1320	1200	1203	1225	1200	1125	1000	1000	1000	900	875	875	875	700	600	600	-
	PA	-	-	-	-	-	FF	1527	1446	1446	1446	1443	1321	1321	1321	971	908	750	-

FF = Fully Flighted

		EXTENSIONS (metres)								
		Fixed						Telescopic		
		0.5	1	1.5	2	2.5	3	1.5	2	3
Auger Range	S2	-	-	-	-	-	-	-	-	-
	S4	•	•	-	-	-	-	-	-	-
	S5	-	•	•	•	-	-	•	•	-
	S6	-	-	•	•	•	•	•	•	-
	PA	-	-	-	•	-	•	-	•	•

### WEAR PARTS REQUIRED FOR GROUND CONDITIONS

#### EARTH (Shock Lock™)

Best suited to soft grounds like earth and clay.

#### TUNGSTEN (Shock Lock™)

Best used in dry, hard or medium ground conditions where floating rocks may be encountered. The perfect all-rounder if you are not sure about what you might encounter.

#### EXTRA DIG PILOT

A stronger pilot for more demanding ground conditions.

## Part of the Auger Torque Earthmoving range

EARTH DRILLS | AUGERS & WEAR PARTS | MAST-BASED DRILLING RIG | TRENCHERS | HAMMERS

[www.augertorque.com](http://www.augertorque.com)

CALL 13 22 12 | EMAIL [sales@augertorque.com.au](mailto:sales@augertorque.com.au)

OR CONTACT YOUR NEAREST DEALER

